Work Order ID 97763 <i>February-21-13 12:43:08 PM</i>			•		Page 1						
Item ID: Revision ID:	D4085-3			Accept	*N900	<u>040</u>	100	* Se	etup Star	t *N	S1*
Item Name:	Placard, Instr	uctions							Stop	, *N	S2*
Start Date: Required Date	2/27/13 : 3/04/13	Start Qty: 10.00 Req'd Qty: 10.00	*10* *10*		Cust Item I Customer:	D:					
Reference: Approvals:		an: MC5	-			ate:		R	un Star Stoj	1/7	R1* R2*
Sequence ID/ Work Center I	ID	Operation Description		Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Re	vision Nbr									
D4085	С										
100 *1		Memo	1911 2	0.00				Ca	l-13/6) 2 / 2 &	10
Purchasing		Manufacture Possible sup	nip electronic file and or e as per Dwg and suppli plier:Studio Letrage ease note is required.	_							
*110		Receive & Inspect for Da	amage & Mat'l Certs	0.00				,	1	12/2/	
Packaging		Memo		0.00						<i>Y Y</i>	

Packaging

NCR:	Voc	1	No
NCK:	Yes	/	No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____Date: _____

NCR: Y	es	/ NO				WORK ORDER WOIN-	CONT	UKIV	MAINCE / OPDATE		QA Closed:	Date:	
Work Orde	r:					DISPOSITION			AGAI	NST DE	PARTMENT/	PROCESS	
Part No.				Rework Scrap Use-as-is		Skid-tube Crosstube Small Fab Thermoforming Finishing				Water Jet J. Eng. Coor. e/Packaging	Engineering Quality Other		
					Work Order Update	_		Large Fab Compo	~ }	Nec/3to	Supplier	Other	
Root					Descr	ription of work order update	lni	tial	Action		Sign &		
Cause		Date	Step	Qty		or Non-conformance	Chie	f Eng	Description		Date	Verification	QC Inspector
oc/Data								ĺ					
quip/Tooling													
perator								l					
/laterial	_							ĺ					
etup	_								1				
Other									•				
rocess													
upplier	_							1					
raining													
Inapproved													
							AULT	CATE	GORY				
Landir	$\overline{}$				_	General				۲	7	_	,
		Bending			L	Bend	\vdash	irain		<u> </u>	Ovalized	<u> </u>	Pressure/Forced
	_	Centre No	ot Concer	ntric to	o/s	BOM/Route	-	ardwa		<u> </u>	Over/Under	 	Temperature/Cure
	_	Cracks			_	Broken/Damaged			on Incomplete		Part Incorred		Weld
		Crushed/0	Crimped.		_	Burrs	-		ions Incomplete/Unclear	<u> </u>	Part Lost/Mi	ssing	Wrong Stock Pulled
		Cuffs				Contamination	1		nance		Part Moved		
		Heat Trea	t		L	Countersink	\bigsqcup^{\vee}	1islabe	led		Positioned V		- -1
		Inspection	n Strip in	Tube		Cut Too Short	\square	1isread			Power Loss/	Surge	Other
		Ripples in	Bend			Drill Holes		ffset	ļ.				
		Torque W	aves in E	xtrusio	n [Drawing		ut of C	Calibration				
[Turning S	equence			Finish		ut of S	equence				
İ		Wave/Tw	ist in Tub	e	Γ	Folio		utside	Dimensions				

Work Ord February-21-1.				*97	763*					Page 2	
tem ID:	D4085-3			Accept	*N900	04010) * s	etup Start	171.	S1*	
tem Name:	Placard, Inst	ructions						Stop	*N:	S2*	
Start Date:	2/27/13	Start Qty: 10.00	*10*		Cust Item I	D:					
Required Date Reference:	e: 3/04/13	Req'd Qty: 10.00	*10*		Customer:		_				
Approvals:	Process P	lan:	Date:	Tooling:	Da	nte:	R	tun Start	1/11	R1*	
			Date:	SPC (Y/N):	Da	ate:		Stop	*NI	R2*	
Sequence ID/ Work Center 120 *120*	ID	Operation Description QC6- Inspect dimensions t	o drawing	Set Up/ Run Hours 0.00 As 27 0.00	Tool ID	Tool # Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp	_
QC Quality Control		Memo		13 3	34						
130		Identify as per dwg & Stoo	k Location:5707	0.00			/ A .			\sim	_
130 Packaging Packaging		Memo		0.00			<u>/0x</u>		-	13-	
. 140		QC21- Final Inspection - \	Work Order Release	0.00					1 /	<u></u>	
*14 ∩ *		Memo		0.00				13/2	3/5	78	
Quality Control									Mu (2	F 3-5	

NCR:	Yes	/	No	
------	-----	---	----	--

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: Date:

										QA Closed:	Date	:
Work Ordei	··				DISPOSITION				AGAINST DE	PARTMENT	PROCESS	
Work Order					Rework	1	S	kid-tube	Crosstube		Water Jet	Engineering
Part No	0.				Scrap	1 1		achining	Small Fab	Pro	d. Eng. Coor.	Quality
					Use-as-is						Other	
NCR N	0.				Work Order Update		Lá	arge Fab	Composite		Supplier	
										·		
					ption of work order update	1	itial		ction	Sign &		
Cause	Date	Step	Qty		or Non-conformance	Chie	ef Eng	Des	cription	Date	Verification	QC Inspector
Doc/Data							:	1				
Equip/Tooling								1				
Operator	_											
Material				:				l I				
Setup	4									Į		
Other	_											
Process	_		,				1					
Supplier												
Training												
Unapproved		<u> </u>			-	<u> </u>		004		<u> </u>	<u></u>	
						AULI	CATEG	JRY		· · · · · · · · · · · · · · · · · · ·		
Landin					General		C		Γ-	Ovalized	Г	Pressure/Forced
-	Bending			- /-	Bend	\vdash	Grain		<u> </u>	Over/Under	talaransa	Temperature/Cure
-	Centre No	ot Concei	ntric to	^{5/5} -	BOM/Route	-	Hardware		-	Part Incorre	-	Weld
}	Cracks			-	Broken/Damaged	\vdash	-	n Încomplete	- /! Imploor	Part Income	⊢	Wrong Stock Pulled
F	Crushed/	crimped.	-	\vdash	Burrs	-		ns Incomplete	e/Onclear	-1	issiiik [
-	Cuffs	. 4		-	Countageink	-	Mainten Midabala	,	-	Part Moved Positioned \	Mrong	
				Countersink	\mathbf{H}	Mislabele Misroad	iui 	<u> </u>	Positioned V		Other	
}			iube	-	Cut Too Short Drill Holes	\vdash	Misread Offset		<u>. </u>	Trower ross/	ouige [Totalet
-	Ripples in		Francis a		_	-		libration				
Torque Waves in Extrusion Drawing				Out of Calibration								
Turning Sequence Finish					\vdash	Out of Sequence Outside Dimensions						
Wave/Twist in Tube				Folio	1 1	outside L	imensions					

Picklist Print

February-21-13 12:43:08 PM

Work Order ID:

97763

Parent Item:

D4085-3

Parent Item Name:

Placard, Instructions

Start Date: 2/27/13

Required Date: 3/04/13

Start Qty: 10.00

Required Qty: 10.00

Page 1

Comments:

IPP Rev:A 10.08.18 new issue DD verf:EC

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4085-3P		Purchased	No			110	Each	0.0000	1	10		12/2	1.7
Placard, Instructions										- Landson	<u> </u>	3/3/	0/ (/0

ΥĖ


NCR:	Yes	1	No
IVCN.	162	1	140

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: Date:

NCK. 16	es / INO				WORK ONDER NON-C	CONT			DATE	QA Closed:	Date	2:
Work Ordei	··		-		DISPOSITION				AGAINST DE	PARTMENT	PROCESS	
					Rework		Skid-tube Crosstube		,	Water Jet Prod. Eng. Coor.		Engineering
Part N	0				Scrap	l I	Machining Small Fab				_	Quality
NCR No.					Use-as-is Work Order Update					Rec/Stor	e/Packaging Supplier	Other
Root				Descri	ption of work order update	Initia	ıl	Ac	tion	Sign &		
Cause	Date	Step	Qty	•	or Non-conformance	Chief E	ng	Desc	ription	Date	Verification	QC Inspector
Doc/Data												
Equip/Tooling											,	
Operator												
Material												
Setup												
Other	_											
Process	_											
Supplier												
Training												
Unapproved				L							<u> </u>	
						AULT CA	ATEGO	₹Y		·		
Landin					General		. 1		<u></u>	1	г	¬- ,-
-	Bending			ļ	Bend	Gra			-	Ovalized	. 	Pressure/Forced
-	Centre No	ot Conce	ntric to	0/s	BOM/Route	\vdash	dware			Over/Under	} -	Temperature/Cure
-	Cracks			_	Broken/Damaged	` ——		Incomplete	_	Part Incorre	-	Weld
_	Crushed/	Crimped.			Burrs	-		s Incomplete/	'Unclear	Part Lost/M	issing	Wrong Stock Pulled
-	Cuffs			-	Contamination	\vdash	intena	ıce	-	Part Moved		
	Heat Treat Countersink						labeled		<u> </u>	Positioned V		
-	Inspection	-	Tube		Cut Too Short		read		<u> </u>	Power Loss/	Surge [Other
]	Ripples in				Drill Holes	Offs						
Torque Waves in Extrusion Drawing				\vdash	of Calil							
Turning Sequence Finish				\vdash	Out of Sequence							
i	Wave/Twist in Tube			Folio	Out	side Dir	nensions					

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

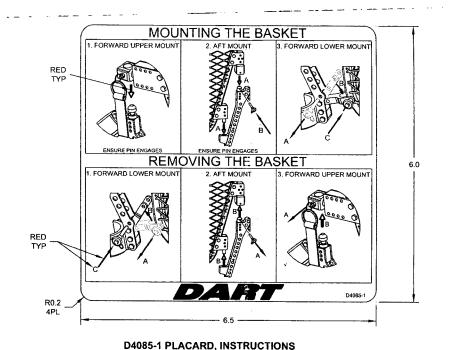

MIL GOOPY e tarnito . NOINE FRING TONTROLLED COPY LICT TO AMENDMENT WITHOUT MOTICE 13-02-21

D

В

Α

 $\underline{\text{NOTES:}}$ 1) MATERIAL: BLACK LETTERS AND GRAPHICS WITH RED ARROWS AND LOGO

ON WHITE BACKGROUND AND ADHESIVE BACK.
MANUFACTURED FROM 3M, 7 MIL MASKING FILM #8522CP OR

AVERY IPM #2031

2) FINISH: N/A

3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED

4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: N/A

6) IDENTIFICATION: N/A

7) WEIGHT: N/A


8) USE FILE D4085-1C.eps FOR GRAPHICS

С	ADDE	D4085-3 (SI	MB	10.06.25					
В	UPDAT	ED PICTORI	ALLY	JPH	10.04.06				
A	NEWIS	SSUE	JPH	10.03.08					
REV.			DESCRIPTION	BY	DATE				
DESIGN		JHH	DART AFR	DART AEROSPACE LTD					
DRAWN		4		HAWKESBURY, ONTARIO, CANADA					
CHECK	ED	A.	DRAWING NO.		REV. C				
MFG. APPR. N/A		N/A_	D4085	SHEET 1 OF					
APPRO	VED	ANP.	TITLE		SCALE				

DATE 10.06.25

DE APPR.

PLACARD, INSTRUCTIONS

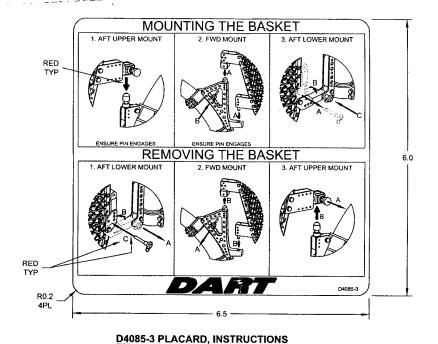

D

С

В

1) MATERIAL: BLACK LETTERS AND GRAPHICS WITH RED ARROWS AND LOGO

ON WHITE BACKGROUND AND ADHESIVE BACK.
MANUFACTURED FROM 3M, 7 MIL MASKING FILM #8522CP OR

AVERY IPM #2031

2) FINISH: N/A

3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED

4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: N/A

6) IDENTIFICATION: N/A 7) WEIGHT: N/A

8) USE FILE D4085-3C.eps FOR GRAPHICS

DESIGN DRAWN	JPH (DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA					
CHECKED	W.	DRAWING NO.	REV. C				
MFG. APPR.	N/A	D4085	SHEET 2 OF 2				
APPROVED	(AND)	TITLE	SCALE				
DE APPR.		PLACARD, INSTRUCTIONS	NTS				
DATE 10 (06.25	COPYRIGHT © 2010 BY DART AERO					



Dart Aerospace Ltd. 1270 Aberdeen Street Hawkesbury, ON K6A 1K7

Tel: 613 632 9577 Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID PO19162

Purchase Order Date 2/22/13 PO Print Date 2/22/13

Page Number 1 of 1

Order From:

VC-STU001

STUDIO DE LETTRAGE 2001

210 MAIN WEST

HAWKESBURY, ON K6A 2H6

Contact Name

Vendor Phone

613 632 5449

Vendor Fax

613 632 9491

Vendor Account Nbr

Buyer

Requisition Nbr Tax Resale Nbr

Terms

Currency

FOB

Chantal Lavoie

10127-2607

Net 30 CAD

Destination-Collect

Ship To:

DART AEROSPACE LTD

1270 ABERDEEN

HAWKESBURY, ON K6A 1K7

CANADA

D4085-31

Line Nbr Reference Revision ID Description/ Mfg ID

Reg Date/

Taxable Unit of Measure

Req Qty/ Ship Method

Unit Price

Extended Price

Vendor Part Number

Placard, Instruction.

2/27/13 Yes 10.00 Yours ppd

Each

\$12.5000

\$125.00

Special Inst:

AS PER DWG D4085 REV. C

PO Total:

\$125.00



No substitution or deviation without consent.

Certificate of Conformity or Material NO Certification required - YES

Change Nbr:

Change Date: 2/22/13

Studio de Lettrage 210 Main street W

Hawkesbury, Ontario K6A 2H6

Chantal havioe

INVOICE

Invoice No.:

19608

Date:

02/27/2013

Ship Date:

Page:

Re: Order No.

WO9377

Sold to:

Dart Aerospace Ltd

1270 Aberdeen

Hawkesbury, Ontario K6A 1K7

Ship to:

Dart Aerospace Ltd

Hawkesbury, Ontario

Business No.:

82500 7651 RT0001

Business	The state of the s	0 /651 KI	Articipate (SARCE of Landers of Control of C	Local de la company de la comp		Z zamanana kar		
Item N	b. 114	Jnit	Quantity	Description	10.75	Tax	- Unit Price	Amount
			10	Sticker reprint D4085-3P PO#19162		Н	12.50	125.00
				H - HST 13% HST		<u> </u>		
				HST				16.25
			\					
				•				
:								
		1						
		į						
				No. of the second secon				
						~		
					,			
		·						
Studio de Le	ttrage HST: #82							
Shipped By:		Tracking Nu	ımber:					
Comment:							a Floral Amount	141.25
Sold By:	e.				•			
								<u></u>

****Certificate of Conformity****					
Customer: Shalio Lettracy	E				
Purchase Order #: Packing Slip #: 9377	Part #: Shuer Serial #:				
Description: D4085-3P	Quantity:				
Certification:					
We hereby certify that:					
The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;					
All work was accomplished in accordance with the Dart Aerospace Purchase Order:					
 Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time. 					
Authority:					
2m					
APPROVAL: Laren Str. Maere DATE:					
Signature: Here Man					
Title: PROject Coordinator	Feb. 27,2013.				

3M

Product & Instruction Bulletin 8522

Release I, Effective September 2008 See Bulletin Change Summary and end of Bulletin This Bulletin now includes Instruction Bulletin 4.23

ScotchcalTM Changeable Opaque Imaging Media

8522

Product Description

Recommended Types of Graphics and End Uses

For Thermal Inkjet Printing

This durable, 7 mil, opaque, changeable film is optimized for use with selected thermal inkjet printers and inks. Ink dries quickly on the film. When overlaminated, it is warranted for medium term, outdoor weatherable graphics, and long term indoor graphics.

When constructed and used as described in this Bulletin, these types of graphics and end uses may be warranted by the 3M™ MCS™ Warranty. Please read the entire Bulletin for details.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
 - Graphics for vans, personal vehicles, trucks and buses
 - Novelty posters
 - Retail and point-of-purchase displays
 - Information graphics such as maps and directories
 - Entertainment promotions in museums, zoos, parks, theatres, sports venues
 - Education and presentation graphics
 - Legal and courtroom exhibits
- For flat or simple curved surfaces, with or without rivets, used in vertical (± 10°) applications

Limitations of End Uses

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs or recommend other products.

Unsuitable End Uses for This Product

- Not for electronically cut individual letters and numbers
- Fleet applications in areas that use salt for winter road maintenance
- Application to non-warranted substrates, including wallboard
- Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.
- Graphics made for automotive Original Equipment Manufacturers (OEM); contact 3M Automotive Division at 1-800-328-1684 for alternatives.

About Water-Based Inkjet Technology

Standard inkjet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this Bulletin. Staying in the middle of these ranges always provides optimum performance.

Compatible Products

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

This Bulletin provides details about the base film and construction options and warranty. Additional specific information about compatible products can be found in the Product and Instruction Bulletins listed in **3M Related Literature** at the end of this bulletin.

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

Film

3M[™] Scotchcal[™] Opaque Imaging Media 8522

Overlaminate

- 3M™ Scotchcal™ Luster Overlaminate 8519
- 3M ™ Scotchcal ™ Matte Overlaminate 8520

Printers and Inks

HP Designjet Printers	HP Inks		
 2500CP and 2000CP 2800CP and 3800CP 3500CP and 3000CP HP Designjet 5000 and 5500 	 Designjet CP Ink System UV (pigment-based) Designjet CP Inkjet System (imaging ink) 		
• Z6100	HP 91 Vivera Ink System		

Epson Printers	Epson Inks	
Stylus Pro 9500	Archival Inks	
 Stylus Pro 10000 printer 		
Stylus Pro 10600 printer		

Characteristics

These are typical values for unprocessed product; processing may change the values. Contact your 3M representative for a custom specification.

Characteristic	Description		
Media	7 mil, white, opaque graphic film		
Liner	Low-slippage, lay flat paper		
Adhesive	Changeable, pressure sensitive		
Thickness	Media with adhesive: 7.5 to 8 mil (nominal)		
Warranted application substrates	See next page.		
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical (± 10°) applications (no corrugations)		
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)		
Removable	For up to one year; see Warranty Information		

Characteristic	Description		
Warranted application substrates	Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.		
	Alodine (anodized aluminum)		
	Automotive panels (automotive painted steel)		
	Fruehauf (painted aluminum)		
	FRP (fiberglass reinforced plywood)Glass		
	Imron® (polyurethane-painted metal panel)		
	Acrylic		
	Sintra ™ board		
	Note: Use on any other substrate is strictly on a graphics manufacturer and customer test and approve basis. Test for both adhesion and removal characteristics. The plasticizer in some banner materials may migrate. This may cause the edge of the graphic to peel or lift off of the banner. For optimum performance, follow the guidelines in the section, Creating A Laminated Overlap, on page 4.		

Warranty Information

The warranty given in the Product Bulletin that is current at the time you purchased the film is the one that 3M will honor. The warranties in the following table(s), given in years, are for finished graphics exposed in a vertical exposure in the United States except the Desert Southwest. See the warranty sections following this table for additional information.

3M[™] MCS[™] Warranty Durability for Finished Graphics

Construction (film and overlaminate on	HP Printers & Inks		Epson Printers & Inks		Removal
warranted substrate	Outdoor	Indoor	Outdoor	indoor	
8522/8519	3 years	5 years	2 years	5 years	1 year without
8522/8520					chemical strippers or tools


Warranty and Limited Remedy

The following is made in lieu of all other express or implied warranties, including any implied warranty of **merchantability** or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade: all 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin. 3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive. In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor or non-3M materials charges.

See the Graphics Market Center Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

Opaque Graphics

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.

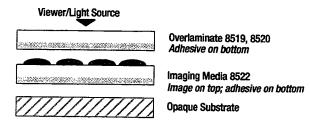

Fabrication

Different combinations of shop temperature and humidity can affect the handling of the media, the protective finish and the printed graphic. For optimum performance, use the *middle* of each of these ranges whenever possible.

Shop Temperature

Acceptable: 60° to 95°F (15° to 35°C)
Optimum: 65° to 73°F (18° to 23°C)

Shop Humidity

Acceptable: 20% to 80% Optimum: 45% to 60%

Condition the Media Before Use

These steps are especially important if you are operating outside the conditions recommended under Fabrication, above.

- Leave the media in its original packaging until you are ready to condition and use it.
- The day before you need it, remove the media from the box and remove the plastic.
- Condition the media for 24 hours in the same environment as the printer.

Printer Settings for Optimum Quality

Refer to your Hewlett Packard printer manual for detailed operating instructions.

The quality of a printed image depends on a combination of factors: correct media selection, printing software and raster imaging processor (RIP), shop conditions, etc.

The printers qualified to use this media have print mode options that are programmed specifically for these media. Current charts that show the various modes and printing dpi, and the quality results you can expect are available at www.hp.com under the website's support section. We recommend that you print the same image at all of these settings to determine acceptable print and productivity results.

The highest quality settings are usually desirable for backlit applications.

The correct media selection makes most other necessary adjustments to the printer.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

Drying Guidelines

Usually, the media can be laminated within 10 minutes after printing. However, especially in high humidity conditions, we recommend waiting 15 to 30 minutes before laminating.


Use care when handling graphics that have not been laminated to avoid scratching and abrasion.

Graphics made with this media and ink combination typically may be wound directly on a take-up roll after printing.

Whether or not you want a warranted graphic, an overlaminate is recommended to enhance durability, especially in outdoor applications.

Overlaminate

FIGURE 1 Typical Laminator Thread-up

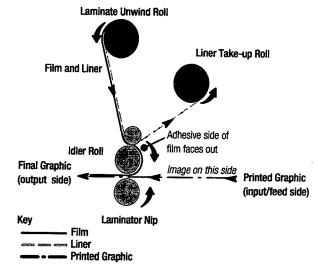

Creating a Laminated Overlap

Creating a laminated overlap helps ensure that the graphic does not peel or lift away from certain banner materials that may be subject to plasticizer migration. This method may also be used for flat, rigid or flexible sign applications.


- 1. Print the graphic as usual.
- 2. On all sides of the graphic, score the film only to the correct, final graphic dimension without cutting through the liner.

Weed away the excess film, leaving the bare liner exposed around the graphic. See FIGURE 2.

FIGURE 2 Trim and Weed Film Margin Only







Weed Margin

Laminate the graphic as usual (see page 5), making sure that at least one inch of the bare liner is covered by the laminate. See FIGURE 3.